
Installation

Please confirm that you have all of the parts before connecting AC-DC adapter and flow sensor

The Controller

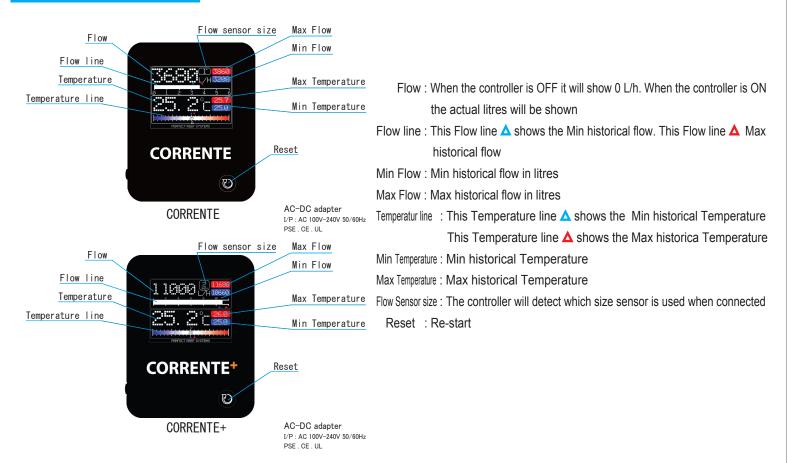

Flow sensor series

Please choose Flow sensor you require from PRS Flow sensor series

CORRENTE can connect to all 4 types of Flow sensor 1/2" ,3/4" , 1" , 1.25" .There are also Splash proof and Water proof Flow sensor. CORRENTE+ can connect to 2 types of Flow sensor 1.5" and 2 . CORRENTE and CORRENTE+ can automatically detect which Flow sensor is used



Model: 1/2" SP or WP Working range: 0-30L/min Water pressure: ≦1.0Mpa Flow Accuracy: ±2%

Temperature Accuracy: ±1% Inside diameter: 8.8mm



Model: 3/4" SP or WP Working range: 0-60L/min Water pressure: ≦1.0Mpa Flow Accuracy: ±2% Temperature Accuracy: ±1% Inside diameter: 13.8mm



Model: 1" SP or WP Working range: 0-100L/min Water pressure: ≦1.2Mpa Flow Accuracy: ±2% Temperature Accuracy: ±1% Inside diameter: 20mm



Model: 1.25" SP or WP Working range: 0-120L/min Water pressure: ≦1.2Mpa Flow Accuracy: ±2% Temperature Accuracy: ±1% Inside diameter: 25mm



Model: 1.5" WP
Working range: 0-150L/min
Water pressure: ≤1.5Mpa
Flow Accuracy: ±2%
Temperature Accuracy: ±19

Temperature Accuracy : ±1% Inside diameter : 33.6mm



Model: 2" WP
Working range: 0-200L/min
Water pressure: ≤1.5Mpa
Flow Accuracy: ±2%
Temperature Accuracy: ±1%
Inside diameter: 43.8mm



Sealing tape (contain in the Flow sensor)